


STORM SERIES

HURRICANE

SEATING	4-6 Adults (Bench, Bucket and Adirondack)
DIMENSIONS	82" x 82" x 37.75"
DRY WEIGHT	900 lbs
WATER CAPACITY	375 - 400 gallons
HYDROTHERAPY JETS	62 Stainless Steel; Graphite Gray Jets
DIGITAL CONTROLS	Top Side control with digital readout, with 4 button and 1 button auxiliary controls.
LIGHTING	2 - Underwater 4" LED Lights, Constellation Light- ing, Chromazon3 Lighting and Starburst Air Controls
WATERFALL	8" LED Waterfall
ICEBUCKET	LED Ice Bucket
SHELL	ABS backed Acrylic Shell with Acrylobond substructure.
SURROUND CABINET	Highwood: Redwood, Gray, Brown, Mahogany or Tan
Insulation	Five Stage Arctic Seal
ELECTRICAL	220 volt 50 amp
PUMPS	2 - 4.0 Horsepower, 56 frame, 2-speed, 220 volts and 1/15 horsepower circulation pumps.
HEATER	5.5kw, stainless steel, with flow through housing.
FILTER	50 square foot with telescopic filter basket.
Ozonator	Ozone water purification system, corona discharge standard.
PILLOWS	Standard
WARRANTY	5 year shell. 3 year no fault.
Cover	UL Approved Safety Cover



SHELL COLOR OPTIONS

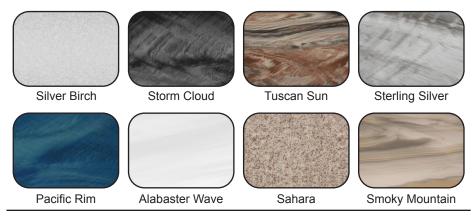

SKIRT COLOR OPTIONS





STORM SERIES - HURRICANE

Seating: 4-6 Adults (Bench, Bucket and Adirondack) Water Capacity: 375 - 400 gallons

Dry Weight: 900 lbs

Hydrotherapy Jets: 62 Stainless Steel; Graphite Gray Jets

Digital Controls: Top Side control with digital readout with 4 button and 1 button auxiliary controls. Lighting: 2 - Underwater 4" LED Lights, Constellation Lighting, Chromazon3 Lighting and Starburst Air

Controls Waterfall: 8" LED Waterfall

Ice Bucket: LED Ice Bucket

Shell: ABS backed Acrylic Shell with Acrylobond substructure.

Surround Cabinet: Highwood: Redwood, Gray, Brown, Mahogany or Tan

Insulation: Five Stage Arctic Seal Electrical: 220 volt 50 amp

Pumps: 2 - 4.0 Horsepower, 56 frame, 2-speed, 220 volts and 1/15 horsepower circulation pumps.

Heater: 5.5kw, stainless steel, with flow through housing.

Filter: 50 square foot with telescopic filter basket.

Ozonator: Ozone water purification system, corona discharge standard.

Pillows: Standard

Warranty: 5 year shell. 3 year no fault. Cover: UL Approved Safety Cover

