

windriverspas.com · 303.789.2656


RESORT series

	5-7 Adults (Retreat whirl-
SEATING	pool, bench, bucket and
OLAINO	lounge seating)
DIMENSIONS	90" x 90" x 38"
DRY WEIGHT	1100 lbs
WATER CAPACITY	525 - 550 gallons
Hydrotherapy Jets	48 Accent Stainless Steel; Graphite Gray Jets
DIGITAL CONTROLS	Top side control with digital readout and 4 button auxiliary control.
LIGHTING	2 - Underwater 4" LED Lights and Constellation Lighting
WATERFALL	8" LED Waterfall
ICEBUCKET	LED Ice Bucket
SHELL	ABS backed Acrylic Shell with Acrylobond substruc- ture.
SURROUND CABINET	Highwood: Redwood, Gray, Brown, Mahogany or Tan
INSULATION	Five Stage Arctic Seal
ELECTRICAL	220 volt 50 amp
Pumps	2 - 3.0 Horsepower, 56 frame, 2-speed, 220 volts and 1/15 horsepower circulation pumps.
HEATER	5.5kw, stainless steel, with flow through housing.
FILTER	50 square foot with telescopic filter basket.
OZONATOR	Ozone water purification system, corona discharge standard.
PILLOWS	Standard
WARRANTY	5 year shell. 3 year no fault.
Cover	UL Approved Safety Cover

TELLURIDE 90" × 90"



SHELL COLOR OPTIONS

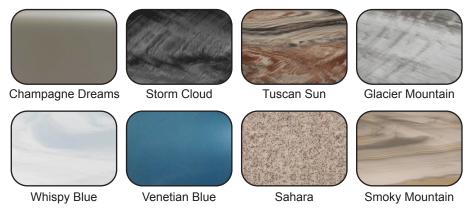

SKIRT COLOR OPTIONS





RESORT SERIES - TELLURIDE

Seating: 5-7 Adults (Retreat whirlpool, bench, and bucket seating) Water Capacity: 525 - 550 gallons Dry Weight: 1100 lbs Hydrotherapy Jets: 48 Stainless Steel; Graphite Gray Jets Digital Controls: Top Side control with digital readout with 4 button and 1 button auxiliary controls. Lighting: 2 - Underwater 4" LED Lights, Constellation Lighting Waterfall: 8" LED Waterfall Ice Bucket: LED Ice Bucket Shell: ABS backed Acrylic Shell with Acrylobond substructure. Surround Cabinet: Highwood: Redwood, Gray, Brown, Mahogany or Tan Insulation: Five Stage Arctic Seal Electrical: 220 volt 50 amp Pumps: 2 - 3.0 Horsepower, 56 frame, 2-speed, 220 volts and 1/15 horsepower circulation pumps. Heater: 5.5kw, stainless steel, with flow through housing. Filter: 50 square foot with telescopic filter basket. Ozonator: Ozone water purification system, corona discharge standard. Pillows: Standard Warranty: 5 year shell. 3 year no fault. Cover: UL Approved Safety Cover

