


# STORM SERIES

## TWISTER 78" × 78"

SEATING	4-5 Adults (Bench, bucket and lounge seating)
DIMENSIONS	78" X 78" X 38"
DRY WEIGHT	850 lbs
WATER CAPACITY	350 - 375 gallons
HYDROTHERAPY JETS	Stainless Steel; Graphite Gray Jets
DIGITAL CONTROLS	Top Side control with digital readout, with 4 button and 1 button auxiliary controls.
LIGHTING	2 - Underwater 4" LED Lights, Constellation Light- ing, Chromazon3 Lighting and Starburst Air Controls
WATERFALL	8" LED Waterfall
ICEBUCKET	None
SHELL	ABS backed Acrylic Shell with Acrylobond substructure.
SURROUND CABINET	Highwood: Redwood, Gray, Brown, Mahogany or Tan
Insulation	Five Stage Arctic Seal
ELECTRICAL	220 volt 50 amp
Pumps	2 - 4.0 Horsepower, 56 frame, 2-speed, 220 volts and 1/15 horsepower circulation pumps.
HEATER	5.5kw, stainless steel, with flow through housing.
FILTER	50 square foot with telescopic filter basket.
OZONATOR	Ozone water purification system, corona discharge standard.
PILLOWS	Standard
WARRANTY	5 year shell. 3 year no fault.
Cover	UL Approved Safety Cover



#### SHELL COLOR OPTIONS

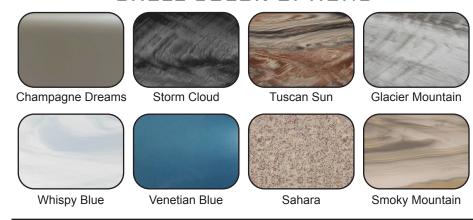

### SKIRT COLOR OPTIONS





#### STORM SERIES - TWISTER

Seating: 4-5 Adults (Bench, Bucket and Lounge)

Water Capacity: 350 - 375 gallons

Dry Weight: 850 lbs

Hydrotherapy Jets: 62 Stainless Steel; Graphite Gray Jets

Digital Controls: Top Side control with digital readout with 4 button and 1 button auxiliary controls. Lighting: 2 - Underwater 4" LED Lights, Constellation Lighting, Chromazon3 Lighting and Starburst Air

Controls Waterfall: 8" LED Waterfall

Ice Bucket: None

Shell: ABS backed Acrylic Shell with Acrylobond substructure.

Surround Cabinet: Highwood: Redwood, Gray, Brown, Mahogany or Tan

Insulation: Five Stage Arctic Seal Electrical: 220 volt 50 amp

Pumps: 2 - 4.0 Horsepower, 56 frame, 2-speed, 220 volts and 1/15 horsepower circulation pumps.

Heater: 5.5kw, stainless steel, with flow through housing.

Filter: 50 square foot with telescopic filter basket.

Ozonator: Ozone water purification system, corona discharge standard.

Pillows: Standard

Warranty: 5 year shell. 3 year no fault. Cover: UL Approved Safety Cover

